

PUMPS OF OKLAHOMA, INC.
1220 N.W. 3rd Street Oklahoma City, Oklahoma 73106
Phone: (405) 235-2695 Fax: (405) 235-9897

**#12 AWG 3 CONDUCTOR PLUS GROUND
PVC FLAT SUBMERSIBLE PUMP CABLE**

PACKAGE CABLE

Flat Parallel Type THW, UL approved cable furnished in pre-cut lengths with water tight neoprene plug on one end for direct connection to Franklin motor. Stranded copper conductor, 3 wire with ground.


APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Manufactured in accordance with UL83 specification for 75°C Type THW cable

Cable features stranded copper conductors, bare, with a moisture resistant plastic insulation.

Note: Not for use with contaminated water. Please see our remediation motor leads for handling contaminated water.

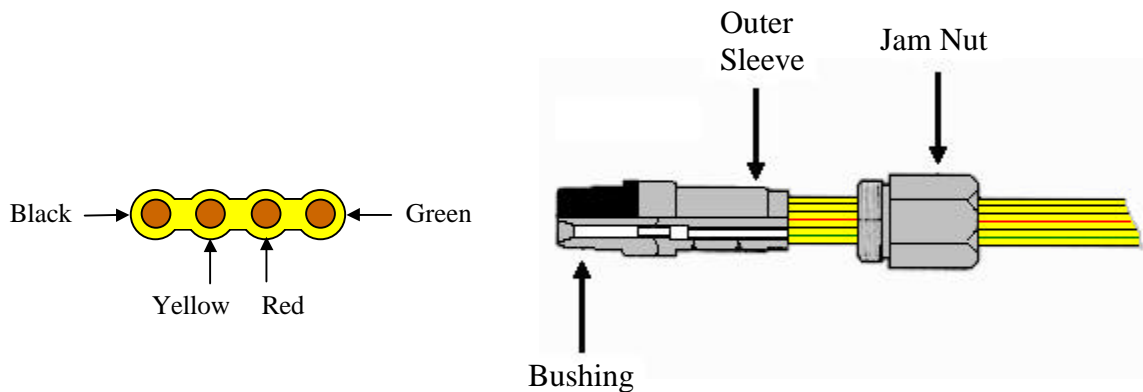

CONSTRUCTION: Jam nut 303 Stainless steel, bushing-neoprene, sleeve 304 stainless

CONDUCTORS: 12 AWG 19 x 0.0185"

INSULATION: Plastic .045" wall nom.

COLOR CODE: Black, Red, Green, and Yellow

FINAL O.D. 0.185" x 0.830"

WEIGHT: 133.9# / 1000' Nom