



1220 N.W. 3<sup>rd</sup> Street Oklahoma City, Oklahoma 73106

Phone: (405) 235-2695 Fax: (405) 235-9897

[www.pumpsofoklahoma.com](http://www.pumpsofoklahoma.com)

**Hi-Lo Supreme 6 AWG 3 conductor plus ground twisted submersible pump cable.**

**Insulated with a premium thermoplastic elastomer (TPE) material.**

#### PACKAGE CABLE



Hi-Lo supreme twisted type, UL approved cable furnished in pre-cut lengths with water tight Viton plug on one end for direct connection to Franklin 6" motors. Cable uses stranded copper conductors.

#### APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Suitable for hot or cold conditions, from -50.F to 200.F, 105.C dry, 75.C wet, 60.C in oil.

STPE thermoplastic rubber is inherently resistant to a wide variety of oils, solvents and chemicals.

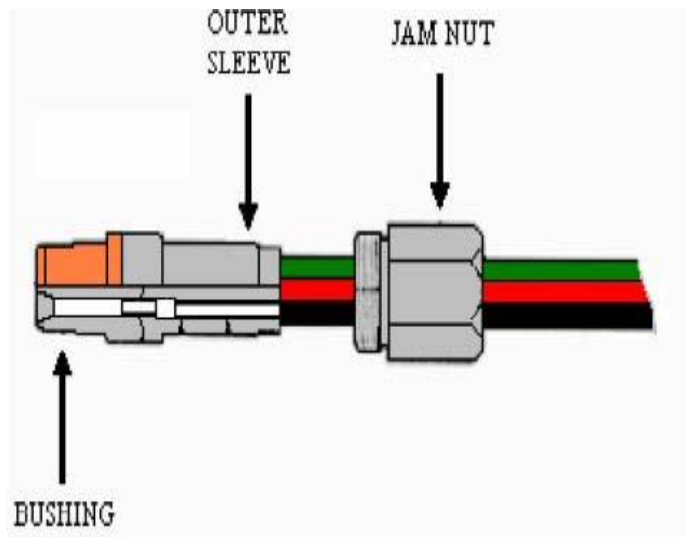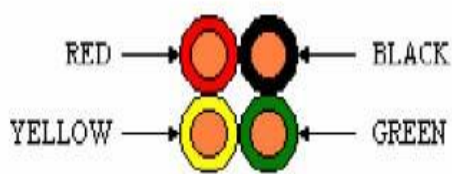

CONSTRUCTION: Jam nut/sleeve - 316 stainless steel, bushing - 6" & 8" Polychloroprene

CONDUCTORS: 6 AWG 19/25 TPC

INSULATION: STPE .060" wall nom.

COLOR CODE: Black, Yellow, Red, Green

OVERALL DIAMETER: 0.750"

WEIGHT: 350.1 lb/1000 ft.