



1220 N.W. 3rd Street Oklahoma City, Oklahoma 73106

Phone: (405) 235-2695 Fax: (405) 235-9897

www.pumpsofoklahoma.com

Hi-Lo Supreme 8 AWG 3 conductor plus ground twisted submersible pump cable.

Insulated with a premium thermoplastic elastomer (TPE) material.

PACKAGE CABLE



Hi-Lo supreme twisted type, UL approved cable furnished in pre-cut lengths with water tight Viton plug on one end for direct connection to Franklin 6" motors. Cable uses stranded copper conductors.

APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Suitable for hot or cold conditions, from -50.F to 200.F, 105.C dry, 75.C wet, 60.C in oil.

STPE thermoplastic rubber is inherently resistant to a wide variety of oils, solvents and chemicals.

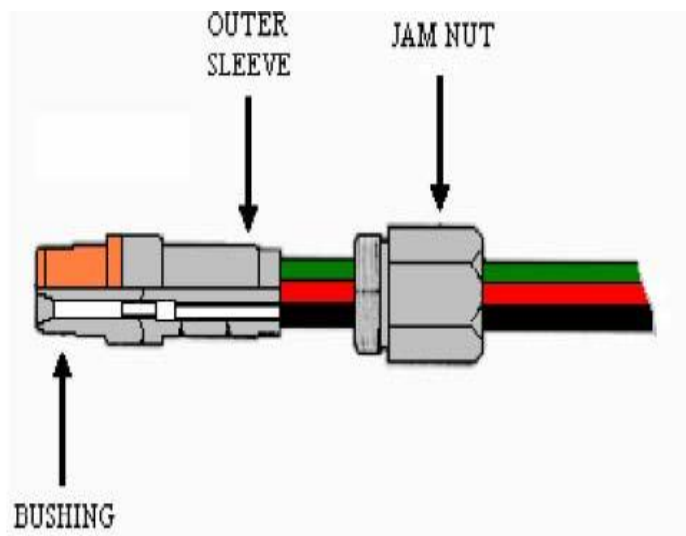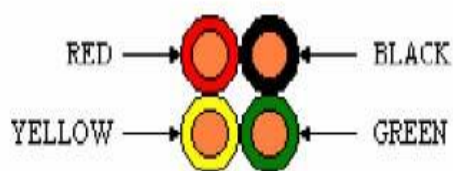

CONSTRUCTION: Jam nut/sleeve - 316 stainless steel, bushing - 6" & 8" Polychloroprene

CONDUCTORS: **19 STR**

INSULATION: STPE .060" wall nom.

COLOR CODE: Black, Yellow, Red, Green

OVERALL DIAMETER: 0.581"

WEIGHT: 249 lb/1000 ft.