

PUMPS OF OKLAHOMA, INC.

1220 N.W. 3RD Street Oklahoma City, Oklahoma 73106



Phone: (405) 235-2695 Fax: (405) 235-9897

www.pumpsoklahoma.com

TEFLON® or TEFZEL® TWISTED SUBMERSIBLE PUMP CABLE

#10 AWG 3CONDUCTOR PLUS GROUND

The construction of this cable exceeds the parameters of UL Standard 44 that covers deep well submersible pump cables. The individual primary wires utilize an extruded, heavy wall ETFE or FEP fluoropolymer which meets the requirements of National Electrical Code 310, table 310-13 for type ZW. ZW wire is suitable for use in wet locations, at 90°C. ETFE/FEP insulated cable are extremely rugged with excellent resistance to cut-through and abrasion. ETFE/FEP are chemically inert and has low permeability and is unaffected by typical acids, bases, solvents and cleaning agents and fuels. ETFE/FEP is flame retardant and non propagating, passes IEEE 383 and UL Vertical Tray Flame Test and UL 1581 at 70,000 BTU/HR and ICEA T-29-520 210,000 BTU/HR ETFE/FEP is rated "non-burning" under ASTM D635. It is rated for 150°C (302°F) conductor operator temperature for continuous use and retains all useful physical properties at temperatures to -100°C (-148°F). ETFE is a radiation resistant dielectric and meets or exceeds all requirements of IEEE 383 and 323. Low surface friction provides easy installation. Due to the physical and electrical characteristics of FEP/ETFE, the cable insulated with these materials stand a very good chance of outliving the life expectancy of the pump to which it is attached.

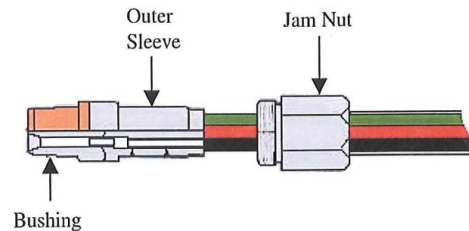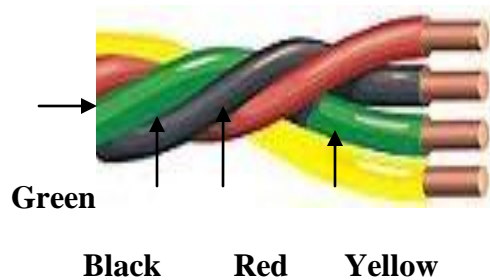

Cable Specifications

CONSTRUCTION: Jam nut 316 Stainless steel, bushing-4`-viton, / 6` & 8` polychloroprene, sleeve 316 stainless

CONDUCTORS: 10 AWG 19/.0234` TPC

INSULATION: Teflon® (FEP) or Tefzel® (ETFE) .0325` wall nom

COLOR CODE: Black, Red, Green and Yellow

AMPACITY: 47A in free air at ambient air temperature of 40°C (104°F)

FINAL O.D NOMINAL.: .395` nom

Teflon® and Tefzel® are registered trademarks of Dupont